


LOCAL DEVELOPMENT PLAN INDIVIDUAL LOT PLAN (LDP No. 10.0)



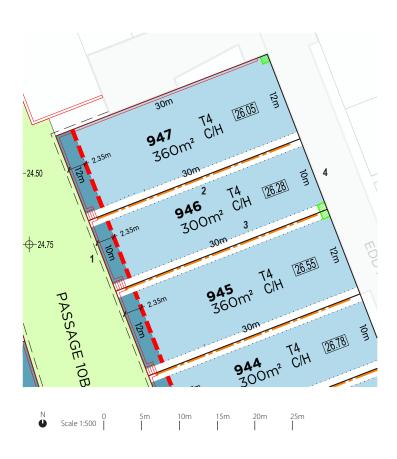

Legend

Building Type

- c Cottage Type
- H House Type

Development Area (Subject to Site Coverage, Setback and BTL requirements refer to Operative Provisions No. 3 and No. 6)

Build-to-line (BTL) (refer to Operative Provision No. 6)

26.28 Datum and Pad Level (refer Operative Provision No. 5)

+24.75 Spot Levels

Permitted Encroachment Zone - Zone in which Verandahs and other Encroachments will be permitted in the Principal Setback (refer to Operative Provision No. 7)

Entry Steps

—— Indicative Retaining Wall Locations

--- Retaining Wall Type 2

— No Vehicular Access

Indicative Services Area

1 Principal Boundary

2 Side Boundary (North)

Side Boundary (South)

4 Rear Boundary

Proposed Light Pole Location

Lot 946 forms part of Local Development Plan (LDP) 10.0. The Private Realm Operative Provisions, together with the Individual Lot Plan ('ILP'), prescribe the specific design requirements applicable to the development of Lot 946. Provisions that are stated as 'Required' are mandatory. Provisions that are stated as 'Permitted' are optional. Definitions for terms used in this ILP are provided in the Jindee Design Code (Agreed Structure Plan No 84) and in the supporting LDP report.

Specific Requirements

ITEM	DESCRIPTION	REQUIREMENT
1	Site Works	
a.	Maximum Lot Level	Refer - Private Realm Operative Provisions
b.	Stormwater Management	Refer - Private Realm Operative Provisions
C.	Retaining Walls	Refer - Private Realm Operative Provisions
2	Number of Dwellings on Lot	
a.	Maximum Number of Single Residential Dwellings	One (1)
b.	Maximum Number of Dwellings Permitted for an Apartment House	N/A
С.	Ancillary Unit	Permitted
3	Dwelling Controls	
a.	Maximum Lot Coverage	75%
b.	Permitted Building Type	Cottage, House
С.	Lot Type Designation	Interior Lot
d.	Permitted Building Dispositions	Edgeyard, Courtyard
e.	Required Terrace Grouping	N/A

ITEM	DESCRIPTION	REQUIREMENT
4	Plinths	
a.	Is a Plinth required for this Lot?	Yes
b.	Has a Plinth been provided by the Jindee Developer and, if so, what type?	Yes - Retaining Wall and stairs as shown on Plan
C.	Will the Lot Owner have to provide a Plinth and, if so, the type of Plinth required (Piers and Infill, Wall, Retaining wall)	No
d.	Required building element to attach to the Plinth	Verandah
5	Building Heights	
a.	Maximum No of Storeys	2 storeys plus loft
b.	Maximum Height	7.5 metres
C.	Lot Datum (from which Building Height is measured)	26.28 AHD

DESCRIPTION	REQUIREMENT	ITEM	DE
Setbacks and Build-to-Lines		9.	Ga
Principal Setback Line	Is parallel to and located 2.35 metres from the Principal Boundary within the Lot, for a length of 8.0 metres measured from the Side	a. b.	Gai mir Add
Secondary Setback Line	N/A	С.	Lot Acc
Side Setback Line (North)	Is parallel to and located 1.0 metre from the Side Boundary (North) within the Lot.	d.	Per
	A portion of one (1) of the Side	a.	Тур
	be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear	11. a.	Pri
Side Setback Line (South)	Is parallel to and located 1.0 metre from the Side Boundary (South)		i. ii.
	A portion of one (1) of the Side Setback Lines (North or South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear Boundary.		iii.
Rear Setback Line	Is located on the Rear Boundary within the Lot.		
Build-to-Line (BTL) Location	Yes. Is parallel to and located 2.35 metres from the Principal Boundary within the Lot for a length of 8.0 metres, measured 1.0 metre from the Side Boundary (both North and South) as shown on the Plan.		iv. V.
BTL Percentage	90% minimum		
Required Parapet Wall Location	N/A		
Permitted Encroachments	The extent to which any Encroachment can encroach into any setback must take into account the BCA (as amended from time to time) and engineering tolerances and limitations of any retaining walls.		vi.
Encroachments in Principal Setback			
i. Permitted Encroachments into Principal Setback	Verandahs, Pergola, Balconies, Eaves, Bay Windows, Portico to define the principal entrance, Plinths or Piers for the Verandah, Steps, Towers, a Terminating Vista	12.	Spe
• • • • • • • • • • • • • • • • • • • •	Element.	a.	ls tl
ii. Extent to which Permitted Encroachments may encroach into the Principal Setback	2.35 metres measured from the Principal Setback Line.		Red Lot Tre Lar
i. Permitted Encroachments into	N/A	13.	Ref
Secondary Setback.	IVA	a.	Red
Encroachments into Side Sethack			
Side Setback (North and South)	Eaves, Shade Devices and Attached Fences.	b.	Red Loc
Permitted Encroachments into Side Setback (North and South) Encroachments into Rear Setback. i. Permitted Encroachments into	Fences.	b.	
i. Permitted Encroachments into Side Setback (North and South) Encroachments into Rear Setback.	Fences. N/A		Loc
 i. Permitted Encroachments into Side Setback (North and South) Encroachments into Rear Setback. i. Permitted Encroachments into Rear Setback 	Fences. N/A	14.	Loc Wa Lar
Permitted Encroachments into Side Setback (North and South) Encroachments into Rear Setback. Permitted Encroachments into Rear Setback Frontage/ Principal Elevation Requ	Fences. N/A sirements	14.	Wa Lar
	Side Setback Line (North) Side Setback Line (South) Rear Setback Line Build-to-Line (BTL) Location BTL Percentage Required Parapet Wall Location Permitted Encroachments Encroachments in Principal Setback i. Permitted Encroachments into Principal Setback ii. Extent to which Permitted Encroachments may encroach into the Principal Setback	metres measured from the Side Setback Line. Secondary Setback Line N/A Side Setback Line (North) Is parallel to and located 1.0 metre from the Side Boundary (North) within the Lot. A portion of one (1) of the Side Setback Lines (North or South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear Boundary. Side Setback Line (South) Is parallel to and located 1.0 metre from the Side Boundary (South) within the Lot. A portion of one (1) of the Side Setback Lines (North or South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear Boundary. Rear Setback Line Is located on the Rear Boundary within the Lot. Build-to-Line (BTL) Location Yes. Is parallel to and located 2.35 metres from the Principal Boundary within the Lot for a length of 8.0 metres, measured 1.0 metre from the Side Boundary (both North and South) as shown on the Plan. BTL Percentage 90% minimum Required Parapet Wall Location N/A Permitted Encroachments The extent to which any Encroachment can encroach into any setback must take into account the BCA (as amended from time to time) and engineering tolerances and limitations of any retaining walls. Encroachments in Principal Setback I. Permitted Encroachments into Principal Setback I. Permitted Encroachments into Principal Setback I. Extent to which Permitted Encroachments may encroach into the Principal entrance, Plinths or Piers for the Verandah, Steps, Towers, a Terminating Vista Element. Ii. Extent to which Permitted Encroachments into Principal Setback Encroachments into Secondary Setback Encroachments into Secondary Setback Encroachments into Secondary Setback	Secondary Setback Line (North) Side Setback Line (North) Side Setback Line (North) Side Setback Line (North) Side Setback Line (North) Setback Lines (North of South) A portion of one (1) of the Side Setback Lines (North of South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear Boundary. Side Setback Line (South) Side Setback Line (Sou

ITEM	DESCRIPTION	REQUIREMENT
9.	Garaging, Parking and Vehicle Ac	cess
a.	Garaging required for this minimum number of cars	Cottage/ House- 2 bays
b.	Additional garaging requirement for Ancillary Unit, if provided	Nil
С.	Lot boundaries where Vehicle Access is prohibited	Principal Boundary, Side Boundary (North and South)
d.	Permitted Garage Disposition	Rear Direct, Rear Side Stack.
10.	Attached Fence and Sideyard Wal	ling
a.	Type required	Attached Fence
11.	Privacy	
а.	Privacy Restrictions on 1st floor and	above
	i. Principal Elevation ii. Rear Elevation on or adjacent to rear boundary	Nil Nil
	iii. Rear elevation internal to a Lot	Openings (other than Balconies, Verandahs or terraces) to be setback 2.0m from Side Boundary unless Screened, or the Opening consists of Celestial Windows or opaque glass windows; Verandahs, terraces and Balconies to be setback a minimum of 4.5m from a Side Boundary, unless Screened.
•••••	iv. Secondary Elevation	N/A
•••••	v. Side Elevation (North)	Open Outlook
		 Openings permitted.
		Verandahs, terraces and Balconies to be setback a minimum of 4.5m from the Side Boundary, unless Screened.
•••••	vi. Side Elevation (South)	Restricted Outlook
		Openings to be setback a minimum of 4.5m from the Side Boundary unless the Opening:
		• is a Celestial Window; or
		is Screened; or
		 is fitted with Opaque Glass.
12.	Specific Design Requirement	
a.	Is there a Specific Design Requirement applicable to this Lot? (Terminated Vista, Corner Treatment, Projecting Front, Laneway Surveillance)	N/A
13.	Refuse storage enclosures and co	llection
a.	Required Bin Storage	Storage for 3 bins provided within the Lot and screened from public view
b.	Required Bin Collection Point Location (required by the City of Wanneroo)	N/A
14.	Landscaping + Street Trees	Refer - Private Realm Operative Provisions
15.	External Fixtures	Refer - Private Realm Operative Provisions
16.	Design Outcomes – Additional Requirements + Controls	Refer - Private Realm Operative Provisions
17.	Exemptions to Planning Approval	Refer - Private Realm Operative Provisions
18.	No modification of building elements provided by Jindee Developer without Consent	Refer - Private Realm Operative Provisions