



LOCAL DEVELOPMENT PLAN INDIVIDUAL LOT PLAN (LDP STAGE 1)



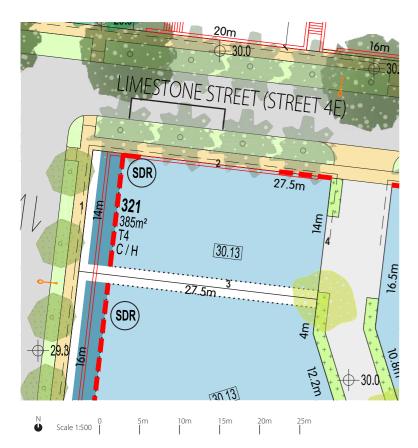

Legend

Building Type

- **c** Cottage
- House
- Specific Design Requirements (refer to Operative Provision No.12)
- Development Area Subject to Site Coverage, Setback and BTL requirements (refer to Operative Provisions No. 3 and No. 6)
- 30.13 Datum and Pad Level (refer Provision No. 5)
- +30.0 Spot Levels
 - Zone in which Verandahs and other Enchroachments will be permitted in the Principal Setback (refer to Operative Provision No. 7)
- Build-to-line (BTL) (refer to Operative Provision No. 6)
- Indicative Retaining Wall Locations
- No Vehicular Access
- Principal Boundary
- Secondary Boundary (North)
- 3 Side Boundary (South)
- 4 Rear Boundary

Lot 321 forms part of the Stage 1 Local Development Plan (LDP) Area. The Private Realm Operative Provisions, together with the Individual Lot Plan (ILP'), prescribe the specific design requirements applicable to the development of Lot 321. Provisions that are stated as 'Required' are mandatory. Provisions that are stated as 'Permitted' are optional. Definitions for terms used in this ILP are provided in the Jindee Design Code (Agreed Structure Plan No 84) and in the LDP Part 1 document.

Specific Requirements

ITEM	DESCRIPTION	REQUIREMENT		
1	Site Works			
a.	Maximum Lot Level	Refer - Private Realm Operative Provisions		
b.	Stormwater Management	Refer - Private Realm Operative Provisions		
C.	Retaining Walls	Refer - Private Realm Operative Provisions		
2	Number of Dwellings on Lot			
a.	Maximum Number of Single Residential Dwellings	One (1)		
b.	Maximum Number of Dwellings Permitted for an Apartment House	N/A		
C.	Ancillary Unit	Permitted		
3	Dwelling Controls			
a.	Maximum Lot Coverage	80%		
b.	Permitted Building Types	House, Cottage		
C.	Lot Type Designation	Edge Lot		
d.	Permitted Building Dispositions	Edgeyard, Courtyard		

ITEM	DESCRIPTION	REQUIREMENT	
4	Plinths		
а.	Is a Plinth required for this Lot?	Yes	
b.	Has a Plinth been provided by the Jindee Developer and, if so, what type?	Yes - Retaining Wall as shown on Plan	
C.	Will the Lot Owner have to provide a Plinth and, if so, the type of Plinth required (Piers and Infill, Wall, Retaining wall)	No	
d.	Required building element to attach to the Plinth	Verandah	
5	Building Heights		
а.	Maximum No of Storeys	2 storeys plus loft.	
b.	Maximum External Wall Height	7.5 metre	
C.	Lot Datum (from which Building Height is measured)	30.13 AHD	

		REQUIREMENT	ITEM	DESCRIPTION	REQUIREMENT
6	Setbacks and Build-to-Lines		9.	Garaging, Parking and Vehicle A	ccess
a.	Principal Setback Line	Is parallel to and located 3.5 metres from the Principal	a.	Garaging required for this minimum number of cars	2
b.	Secondary Setback Line (north)	Boundary within the Lot. Is located on the Secondary	b.	Additional garaging requirement for Ancillary Unit	Nil
С.	Side Setback Line (south)	Boundary within the Lot. Is parallel to and located 1.0 metre from the Side Boundary	C.	Lot boundaries where Vehicle Access is prohibited	Principal Boundary, Secondary Boundary, and Side Boundary (south)
		(south) within the Lot. A portion of the Side Setback	d.	Permitted Garage Disposition	Rear Direct, Rear Side Stack, Rear Side Court
		Line (south) may be located on the Side Boundary, for a distance	10.	Attached and Sideyard Walling	
	•••••	of up to 12 metres measured from the Rear Boundary.	a. 11.	Type of Walling required Privacy	Attached
d.	Side Setback Line	N/A		· · · · · · · · · · · · · · · · · · ·	1.1
е.	Rear Setback Line	Is located on the Rear Boundary	a.	Privacy Restrictions on 1st floor an	• • • • • • • • • • • • • • • • • • • •
f.	Build-to-Line (BTL) Location	Yes. 1) Is parallel to and located 3.5 metres from the Principal Boundary within the Lot and continuing for a length of 2		Principal Elevation Rear Elevation on or adjacent to rear boundary	Nil Nil
		continuing for a length of 2 metres parallel to and located 1.0m from the Secondary Boundary; and 2) Is parallel to and located 1.0m from the Secondary Boundary for a length of 6m measured from the Rear Boundary.		iii. Rear elevation internal to a Lot	Openings (other than Balconies, Verandahs or terraces) to be setback 2m from Side Boundary unless Screened, or the Opening consists of Celestial Windows or opaque glass windows; Varandahs terraces and
g.	BTL Percentage	BTL 1) 70% and BTL 2) 100%			 Verandahs, terraces and Balconies to be setback
7.	Permitted Encroachments				a minimum of 4.5m from a Side Boundary, unless
a.	Encroachments in Principal Setbac	k			Screened.
•••••	i. Permitted Encroachments into Principal Setback	Verandahs, Balconies, Eaves, Projecting Fronts, Bay Windows, Portico to define the principal entrance, Plinths or Piers for the Verandah, Steps, Towers, a Terminating Vista Element		iv. Secondary Elevation (north) v. Side Elevation (south)	Nil Restricted Outlook Openings to be setback a minimum of 4.5m from the Side
•••••	ii. Extent to which Permitted Encroachments may encroach into the Principal Setback	2.5 metres measured from the Principal Setback Line. An exception to this is Steps, which are not restricted.			 Boundary unless the Opening: is a Celestial Window; or is Screened; or is fitted with Opaque Glass.
b.	Encroachments into Secondary Se	tback		vi. Side Elevation	N/A
	Permitted Encroachments into Secondary Setback.	N/A	12.	Specific Design Requirement	
	ii. Extent to which Permitted Encroachments may encroach into the Secondary Setback	N/A	a.	Is there a Specific Design Requirement applicable to this Lot? (Terminated Vista, Corner Treatment, Projecting Front, Laneway Surveillance)	Yes - Corner Treatment (location of Specific Design Requirement is graphically depicted on the attached plan as 'SDR')
С.	Encroachments into Side Setback		13.	Refuse storage enclosures and o	ollection
•••••	i. Permitted Encroachments into Side Setback	Side Setback (South) - Eaves, Shade Devices and Attached Walls	a.	Required Bin Storage	Storage for 2 bins provided within the Lot and screened from public view
•••••	ii. Extent to which Permitted Encroachments may encroach into a Side Setback	Side Setback (South) Restricted by the BCA and the tolerances of any retaining walls	b.	Required Bin Collection Point Location (required by the City of Wanneroo)	N/A
d.	Encroachments into Rear Setback. i. Permitted Encroachments	N/A	14.	Landscaping + Street Trees	Refer - Private Realm Operative Provisions
	into Rear Setback	N/A	15.	External Fixtures	Refer - Private Realm Operative Provisions
	Encroachments may encroach into a Rear Setback		16.	Design Outcomes - Additional Requirements + Controls	Refer - Private Realm Operative Provisions
8.	Frontage/ Principal Elevation Re	<u> </u>	17.	Exemptions to Planning Approval	Refer - Private Realm Operative Provisions
a. b.	Required Private Frontage Type Permitted Principal Building Elevation Types	Verandah. Straight Front, Projecting Front, a Return Verandah, a Projecting Front and a Return Verandah, a	18.	No modification of building elements provided by JIndee Developer without Consent	Refer - Private Realm Operative Provisions