


LOCAL DEVELOPMENT PLAN **INDIVIDUAL LOT PLAN** (LDP No. 10.0)

LOT 296 T3 TRANSECT LOT TYPE AREA (APPROX M²) 599 LOT FRONTAGE 17m

Interior

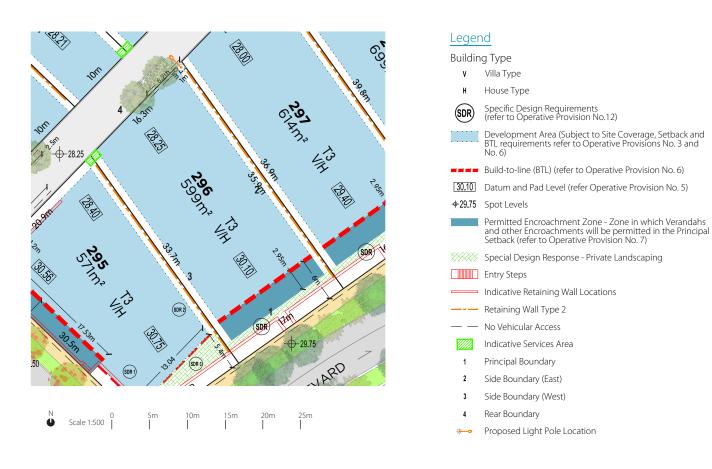

Lot 296 forms part of Local Development Plan (LDP) 10.0. The Private Realm Operative Provisions, together with the Individual Lot Plan ('ILP'), prescribe the specific design requirements applicable to the development of Lot 296. Provisions that are stated as 'Required' are mandatory. Provisions that are stated as 'Permitted' are optional. Definitions for terms used in this ILP are provided in the Jindee Design Code (Agreed Structure Plan No 84) and in the supporting LDP report.

Specific Requirements

ITEM	DESCRIPTION	REQUIREMENT
1	Site Works	
a.	Maximum Lot Level	Refer - Private Realm Operative Provisions
b.	Stormwater Management	Refer - Private Realm Operative Provisions
C.	Retaining Walls	Refer - Private Realm Operative Provisions
2	Number of Dwellings on Lot	
a.	Maximum Number of Single Residential Dwellings	One (1)
b.	Maximum Number of Dwellings Permitted for an Apartment House	N/A
C.	Ancillary Unit	Permitted
3	Dwelling Controls	
a.	Maximum Lot Coverage	65%
b.	Permitted Building Types	
		Interior Lot
d.	Permitted Building Dispositions	
е.	Required Terrace Grouping	N/A

ITEM	DESCRIPTION	REQUIREMENT
4	Plinths	
a.	Is a Plinth required for this Lot?	Yes
b.	Has a Plinth been provided by the Jindee Developer and, if so, what type?	Yes. Retaining wall and stairs as shown on plan.
C.	Will the Lot Owner have to provide a Plinth and, if so, the type of Plinth required (Piers and Infill, Wall, Retaining wall)	No
d.	Required building element to attach to the Plinth	N/A
5	Building Heights	
a.	Maximum No of Storeys	2 storeys plus loft
b.	Maximum External Wall Height	7.5 metres
C.	Lot Datum (from which Building Height is measured)	28.25 AHD, 30.10AHD

Jindee Local Development Plan No 10.0 | Individual Lot Plans | Rev 0 Mod 0. November 2023, ©2023 Studio LFA + Hatch robertsday

ITEM	DESCRIPTION	REQUIREMENT
6	Setbacks and Build-to-Lines	
a.	Principal Setback Line	Is parallel to and located 6.0 metres from the Principal Boundary, for a length of 15 metres measured from the Side Boundary, within the Lot.
b.	Secondary Setback Line	N/A
C.	Side Setback Line (East)	Is parallel to and located 1.0 metre from the Side Boundary (East) within the Lot.
d.	Side Setback Line (West)	Is parallel to and located 1.0 metre from the Side Boundary (West) within the Lot.
е.	Rear Setback Line	Is located on the Rear Boundary within the Lot.
f.	Build-to-Line (BTL) Location	Yes. BTL Is parallel to and located on the Principal Setback Line.
g.	BTL Percentage	75%
h.	Required Parapet Wall Location	N/A
7.	Permitted Encroachments	The extent to which any Encroachment can encroach into any setback must take into account the BCA (as amended from time to time) and engineering tolerances and limitations of any retaining walls.
a.	Encroachments beyond Principal Set	back
	i. Permitted Encroachments beyond the Principal Setback	Verandahs, Balconies, Eaves, Projecting Fronts, Bay Windows, Portico to define the principal entrance, Plinths or Piers to the Verandah, Steps.
••••	ii. Extent to which Permitted Encroachments may encroach beyond the Principal Setback	2.95 metres measured from the Principal Setback Line.
 b.	Encroachments into Secondary Setba	ack
	i. Permitted Encroachments into Secondary Setback.	N/A
	ii. Extent to which Permitted Encroachments may encroach beyond the Secondary Setback	N/A
С.	Encroachments into Side Setback	•••••••••••••••••••••••••••••••••••••••
•••••	i. Permitted Encroachments into Side Setback (East and West)	Eaves, Shade Devices and Attached Fences.
d.	Encroachments into Rear Setback. i. Permitted Encroachments into	N/A
	Rear Setback ii. Extent to which Permitted Encroachments may encroach	N/A
8.	beyond the Rear Setback Frontage/ Principal Elevation Requ	uirements
a.	Required Private Frontage Type	Verandah
b.	Permitted Principal Building Elevation Types	Straight Front, Projecting Front, a Return Verandah, a Projecting Front and a Return Verandah, a Double Return Verandah and a Double Projecting Front.
9.	Garaging, Parking and Vehicle Acc	ess
a.	Garaging required for this minimum number of cars	Villa/ House - 2 bays
b.	Additional garaging requirement for Ancillary Unit, if provided	Nil
C.	Lot boundaries where Vehicle Access is prohibited	Principal Boundary, Side Boundary (East and West) and a portion of the Rear Boundary as depicted on the Plan.
d.	Permitted Garage Disposition	Rear Direct , Rear Side Court, Rear Back Court, Rear Side Stack.

ITEM	DESCRIPTION	REQUIREMENT			
10.	Attached Fencing and Sideyard W	alling			
a.	Type required	Attached Fence			
11.	Privacy				
a.	a. Privacy Restrictions on 1st floor and above				
	i. Principal Elevation	Nil			
	ii. Rear Elevation on or adjacent to rear boundary	Nil			
	iii. Rear elevation internal to a Lot	 Openings (other than Balconies, Verandahs or terraces) to be setback 2m from Side Boundary unless Screened, or the Opening consists of Celestial Windows or opaque glass windows; Verandahs, terraces and Balconies to be setback a minimum of 4.5m from a Side Boundary, unless Screened. 			
•••••	iv. Secondary Elevation	N/A			
•••••	v. Side Elevation (East)	Open Outlook.			
		Openings permitted.			
		 Verandahs, terraces and Balconies to be setback a minimum of 4.5m from the Side Boundary, unless Screened. 			
•••••	vi. Side Elevation (West)	Restricted Outlook			
		Openings to be setback a minimum of 4.5m from the Side Boundary unless the Opening:			
		• is a Celestial Window; or			
		is Screened; or			
		is fitted with Opaque Glass.			
12.	Specific Design Requirement				
a.	Is there a Specific Design Requirement applicable to this Lot? (Terminated Vista, Corner Treatment, Projecting Front, Laneway Surveillance)	Yes - One required (mandated) SDR SDR) Landscaping area within the Lot as depicted on the Plan. For the purposes of this provision, Landscaping has the meaning attributed to it in the Architectural Standards for Jindee.			
13.	Refuse storage enclosures and col	lection			
a.	Required Bin Storage	Storage for 3 bins provided within the Lot and screened from public view			
b.	Required Bin Collection Point Location (required by the City of Wanneroo)	N/A			
14.	Landscaping + Street Trees	Refer - Private Realm Operative Provisions			
15.	External Fixtures	Refer - Private Realm Operative Provisions			
16.	Design Outcomes – Additional Requirements + Controls	Refer - Private Realm Operative Provisions			
17.	Exemptions to Planning Approval	Refer - Private Realm Operative Provisions			
18.	No modification of building elements provided by Jindee Developer without Consent	Refer - Private Realm Operative Provisions			