


LOCAL DEVELOPMENT PLAN 5.0 RELEASE 2 - INDIVIDUAL LOT PLAN (LDP No. 5.0)

LOT 107 Т4 **TRANSECT** LOT TYPE Interior AREA (APPROX M2) 300 LOT FRONTAGE 10m

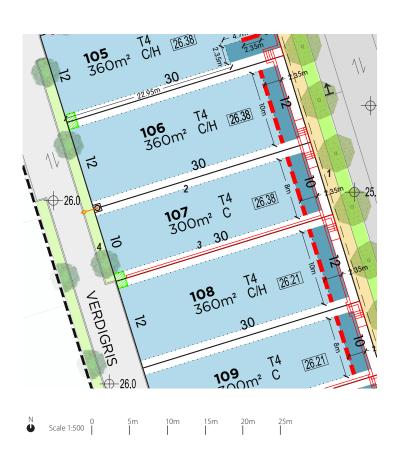

Legend

Building Type

- Cottage
- House

Specific Design Requirements (refer to Operative Provision No.12)

Development Area Subject to Site Coverage, Setback and BTL requirements (refer to Operative Provisions No. 3 and No. 6)

[26.38] Datum and Pad Level (refer Operative Provision No. 5)

+ 25.0 Spot Levels

Permitted Encroachment Zone - Zone in which Verandahs and other Encroachments will be permitted in the Principal Setback (refer to Operative Provision No. 7)

Build-to-line (BTL) (refer to Operative Provision No. 6)

Indicative Retaining Wall Locations

Entry Steps

- No Vehicular Access

Indicative Services Area

Principal Boundary

Side Boundary (North)

Side Boundary (South)

Rear Boundary

Signage (No Stopping Areas)

Lot 107 forms part of Local Development Plan (LDP) 5.0. The Private Realm Operative Provisions, together with the Individual Lot Plan (ILP'), prescribe the specific design requirements applicable to the development of Lot 107. Provisions that are stated as 'Required' are mandatory. Provisions that are stated as 'Permitted' are optional. Definitions for terms used in this ILP are provided in the Jindee Design Code (Agreed Structure Plan No 84) and in the supporting LDP report.

Specific Requirements

ITEM	DESCRIPTION	REQUIREMENT	
1	Site Works		
а.	Maximum Lot Level	Refer - Private Realm Operative Provisions	
b.	Stormwater Management	Refer - Private Realm Operative Provisions	
C.	Retaining Walls	Refer - Private Realm Operative Provisions	
2	Number of Dwellings on Lot		
a.	Maximum Number of Single Residential Dwellings	One (1)	
b.	Maximum Number of Dwellings Permitted for an Apartment House	N/A	
C.	Ancillary Unit	Permitted	
3	Dwelling Controls		
а.	Maximum Lot Coverage	75%	
b.	Permitted Building Types	Cottage	
C.	Lot Type Designation	Interior Lot	
d.	Permitted Building Dispositions	Edgeyard, Courtyard	
e.	Required Terrace Grouping	N/A	

ITEM	DESCRIPTION	REQUIREMENT
4	Plinths	
а.	Is a Plinth required for this Lot?	Yes
b.	Has a Plinth been provided by the Jindee Developer and, if so, what type?	Yes - Retaining Wall as shown on Plan
С.	Will the Lot Owner have to provide a Plinth and, if so, the type of Plinth required (Piers and Infill, Wall, Retaining wall)	No
d.	Required building element to attach to the Plinth	Verandah
5	Building Heights	
а.	Maximum No of Storeys	2 storeys plus loft.
b.	Maximum Height	7.5 metres
C.	Lot Datum (from which Building Height is measured)	26.38 AHD

ITEM	DESCRIPTION	REQUIREMENT	ITEM
6	Setbacks and Build-to-Lines		9.
a.	Principal Setback Line	Is parallel to and located 3.55 metres from the Principal Boundary within the Lot.	a
b.	Secondary Setback Line	N/A	b
• • • • • • • • • • • • • • • • • • • •	Side Setback Line (North)	Is parallel to and located 1.0 metre from the Side Boundary (North) within the Lot.	C
		A portion of one (1) of the Side	d.
		Setback Lines (North or South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear	10.
			a. 11.
	Cida Cathady Lina (Cauth)	Boundary.	a
d.	Side Setback Line (South)	Is parallel to and located 1.0 metre from the Side Boundary (South) within the Lot.	
		A portion of one (1) of the Side Setback Lines (North or South) may be located on the relevant Side Boundary, for a distance of up to 12 metres measured from the Rear Boundary.	······i
е.	Rear Setback Line	Is located on the Rear Boundary within the Lot.	
f.	Build-to-Line (BTL) Location	Yes. Is parallel to and located 3.55 metres from the Principal Boundary within the Lot for a length of 8.0 metres, measured 1.0 metre from the Side Boundary (both North and	••••••••••••••••••••••••••••••••••••••
		South) as shown on the Plan.	•••••
g.	BTL Percentage	80% minimum.	
h.	Required Parapet Wall Location	N/A	
7.	Permitted Encroachments	The extent to which any Encroachment can encroach into any setback must take into account of the BCA and engineering tolerances and limitations of any retaining walls.	••••••
а.	Encroachments in Principal Setback		
	i. Permitted Encroachments into Principal Setback	Verandahs, Balconies, Eaves, Projecting Fronts, Bay Windows, Portico to define the principal entrance, Gatehouse, Plinths or Piers for the Verandah, Steps.	
•••••	ii. Extent to which Permitted	2.35 metres measured from	12.
	Encroachments may encroach into the Principal Setback	the Principal Setback Line. An exception to this is Steps, which are not restricted.	a.
b.	Encroachments into Secondary Setb	ack	
	i. Permitted Encroachments into	N/A	12
	Secondary Setback.	•••••••••••••••••••••••••••••••••••••••	13.
	Encroachments into Side Setbacki. Permitted Encroachments into	Eaves, Shade Devices and Attached	a.
	Side Setback (North and South)	Fences.	b.
d.	Encroachments into Rear Setback. i. Permitted Encroachments into Rear Setback	N/A	1.4
8.	Frontage/ Principal Elevation Requi	rements	14.
a.	Required Private Frontage Type	Verandah	15.
b.	Permitted Principal Building Elevation Types	Straight Front, Projecting Front, a Return Verandah, a Projecting Front and a Return Verandah, a Double Return Verandah and a Double Projecting Front.	16.
			17.
			10

ITEM	DESCRIPTION	REQUIREMENT		
9.	Garaging, Parking and Vehicle Acces	Garaging, Parking and Vehicle Access		
a.	Garaging required for this minimum number of cars	Cottage - 2 bays		
b.	Additional garaging requirement Nil for Ancillary Unit, if provided			
C.	Lot boundaries where Vehicle Access is prohibited	Principal Boundary, Side Boundary (North and South)		
d.	Permitted Garage Disposition	Rear Direct, Rear Side Stack.		
10.	Attached Fence and Sideyard Wallin	ng		
a.	Type required	Attached Fence		
11.	Privacy			
a	Privacy Restrictions on 1st floor and a i. Principal Elevation ii. Rear Elevation on or adjacent to rear boundary iii. Rear elevation internal to a Lot	Nil Nil Openings (other than Balconies, Verandahs or		
		terraces) to be setback 2.0m from Side Boundary unless Screened, or the Opening consists of Celestial Windows or opaque glass windows; Verandahs, terraces and Balconies to be setback a minimum of 4.5m from a Side		
• • • • • • • • • • • • • • • • • • • •	iv. Secondary Elevation	Boundary, unless Screened. N/A		
• • • • • • • •	v. Side Elevation (North)	Open Outlook		
	v. Side Elevation (North)	Openings permitted.		
		Verandahs, terraces and Balconies to be setback a minimum of 4.5m from the Side Boundary, unless Screened.		
•••••	vi. Side Elevation (South)	Restricted Outlook		
		Openings to be setback a minimum of 4.5m from the Side Boundary unless the Opening:		
		is a Celestial Window; oris Screened; or		
		• is fitted with Opaque Glass.		
12.	Specific Design Requirement			
a.	Is there a Specific Design Requirement applicable to this Lot? (Terminated Vista, Corner Treatment, Projecting Front, Laneway Surveillance)	N/A		
13.	Refuse storage enclosures and colle	ection		
a.	Required Bin Storage	Storage for 2 bins provided within the Lot and screened from public view		
b.	Required Bin Collection Point Location (required by the City of Wanneroo)	N/A		
14.	Landscaping + Street Trees	Refer - Private Realm Operative Provisions		
15.	External Fixtures	Refer - Private Realm Operative Provisions		
16.	Design Outcomes – Additional Requirements + Controls	Refer - Private Realm Operative Provisions		
17.	Exemptions to Planning Approval	Refer - Private Realm Operative Provisions		
18.	No modification of building elements provided by Jindee Developer without Consent	Refer - Private Realm Operative Provisions		